

# Volberg – The Original

## Europe's best-selling temporary security door for construction sites

We secure your construction site – quickly.



- ✓ **Resistance class 2 (RC2) as minimum standard**
- ✓ **Heavy-duty steel door Made in Germany**
- ✓ **Certified by German Association for Technical Inspection (TÜV)**
- ✓ **ABUS profile cylinder lock**
- ✓ **Portable and re-usable**
- ✓ **Customized sizes for different door openings on demand**
- ✓ **Excellent value-for-money**



Security Tech Germany

*Das gute Gefühl der Sicherheit*

Over 350 sales partners worldwide.

**Phone: +49 2202/9533-40**  
**Mo-Sa 7:30 a.m. – 7:00 p.m.**

**[www.volberg-bauschutz.com](http://www.volberg-bauschutz.com)**

**VOLBERG**  
**Bauschutzsysteme**


# Volberg – Your first choice to secure your construction site

The patented Original




- ✓ Quick and easy way of securing rooms and buildings on a short term basis.
- ✓ All models boast resistance class 2 (RC2) oder 3 (RC3).
- ✓ Customized versions with different sizes.
- ✓ Installing the door takes only several minutes. Re-usable.
- ✓ Door cannot be jimmied due to special frame design.
- ✓ ABUS profile cylinder can't be pulled.
- ✓ Galvanized 1.0mm/1.25mm stainless steel sheet.
- ✓ Opening DIN-standard left.
- ✓ Weight 36-63 kg depending on size.

## Measurements

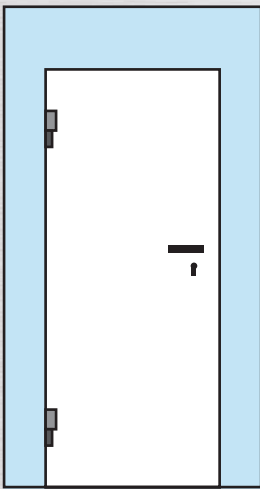

Doorframe measurements

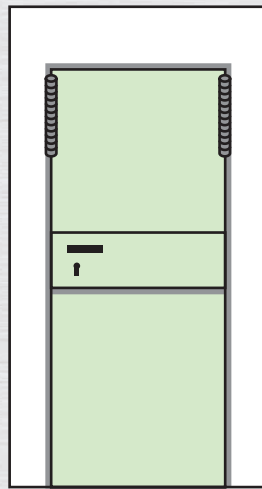

Door measurements

## The Volberg Bauschutztür®

Technical details:

- ✓ Hot-galvanized clamps that screw easily into the doorframe.
- ✓ ABUS profile cylinder prevents drill out of the lock.
- ✓ Additional fixture at floor panel.



Standard versions	RC <sup>1</sup>	Doorframe measurements		Door measurements	Weight
		Height	Width	Height x Width	
<b>Basic 180 OV *</b>	<b>2</b>	<b>1.850-2.100 mm</b>	<b>875-1.100 mm</b>	<b>1.800 x 750 mm</b>	<b>38 kg</b>
<b>Basic 190 OV *</b>	<b>2</b>	<b>1.950-2.100 mm</b>	<b>875-1.100 mm</b>	<b>1.900 x 750 mm</b>	<b>38 kg</b>
<b>Security 180 OV *</b>	<b>3</b>	<b>1.850-2.100 mm</b>	<b>790-1.080 mm</b>	<b>1.800 x 670 mm</b>	<b>48 kg</b>
<b>Security 190 OV *</b>	<b>3</b>	<b>1.950-2.100 mm</b>	<b>875-1.100 mm</b>	<b>1.900 x 750 mm</b>	<b>48 kg</b>
<b>Special versions</b>					
<b>Basic small OV</b>	2	1.850-2.100 mm	600-900 mm	1.800 x 480 mm	36 kg
<b>Basic high OV</b>	2	2.050-2.300 mm	900-1.200 mm	2.000 x 750 mm	50 kg
<b>Basic XL OV</b>	2	1.850-2.100 mm	1.175-1.450 mm	1.800 x 1.000 mm	59 kg
<b>Basic XXL OV</b>	2	2.050-2.300 mm	1.400-1.700 mm	2.000 x 1.250 mm	63 kg
<b>Escape door with panic lock (up to 200 persons)</b>	2	2.050-2.300 mm	1.400-1.700 mm	2.000 x 1.250 mm	63 kg
<b>Door element for mobile fence / building fence</b>	-	-	-	1.800 x 750 mm	38 kg

<sup>1</sup>RC = resistance class \* **Bestseller**

Volberg Bauschutzsysteme GmbH  
Britanniahütte 2 · D-51469 Bergisch Gladbach  
Germany

[www.volberg-bauschutz.com](http://www.volberg-bauschutz.com)

**Phone: +49 2202/9533-40**  
**Mo-Sa 7:30 a.m. – 7:00 p.m.**

[service@volberg-bauschutz.com](mailto:service@volberg-bauschutz.com)